


Industrial (LR6)

**AA**



**Industry Standard Dimensions**

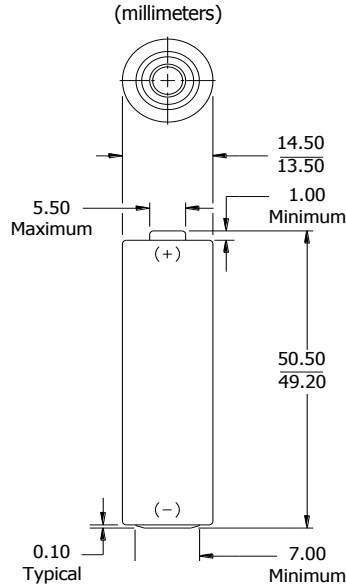


**Specifications**

<b>Classification:</b>	Alkaline
<b>Chemical System:</b>	Zinc-Manganese Dioxide (Zn/MnO <sub>2</sub> ) No added mercury or cadmium
<b>Designation:</b>	IEC-LR6
<b>Nominal Voltage:</b>	1.5 volts
<b>Nominal IR:</b>	150 to 300 milliohms (fresh)*
<b>Operating Temp:</b>	-18°C to 55°C
<b>Typical Weight:</b>	23.0 grams
<b>Typical Volume:</b>	8.1 cubic centimeters
<b>Jacket:</b>	Plastic Label
<b>Shelf Life:</b>	10 years at 21°C (80% of initial capacity)
<b>Terminal:</b>	Flat Contact


\* For additional information, please reference the [IR technical white paper](#).

**Milliamp-Hours Capacity**


Continuous discharge to 0.8 volts at 21°C

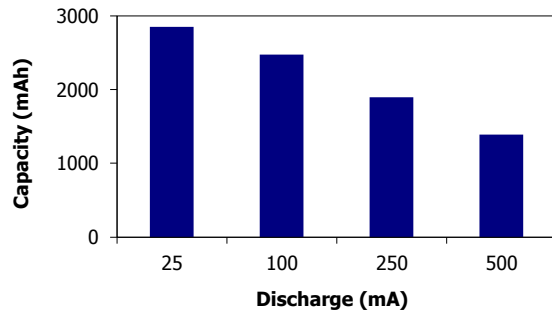

**Industry Standard Testing (21°C):**

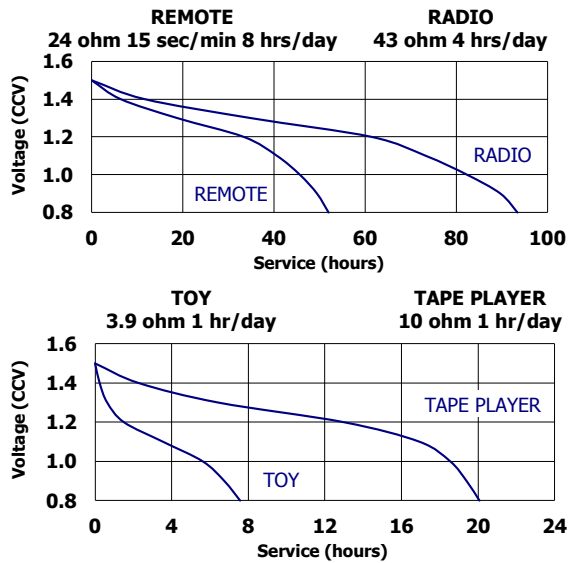

**Battery Selection Indicator**

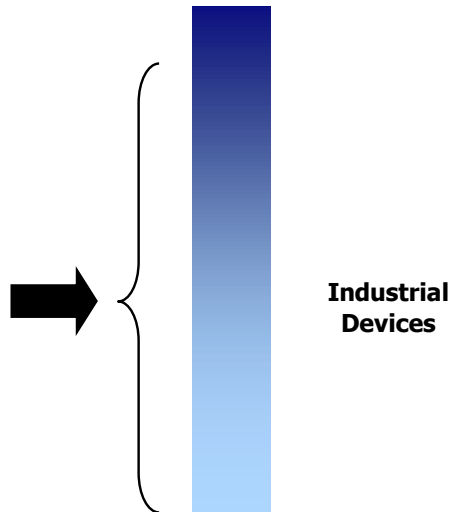

**Important Notice**


This datasheet contains typical information specific to products manufactured at the time of its publication.  
©Energizer Holdings, Inc. - Contents herein do not constitute a warranty.

Industrial (LR03)

AAA



Industry Standard Dimensions

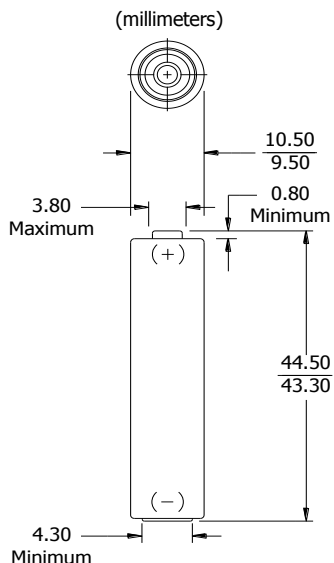


Specifications

<b>Classification:</b>	Alkaline
<b>Chemical System:</b>	Zinc-Manganese Dioxide (Zn/MnO <sub>2</sub> ) No added mercury or cadmium
<b>Designation:</b>	IEC-LR03
<b>Nominal Voltage:</b>	1.5 volts
<b>Nominal IR:</b>	150 to 300 milliohms (fresh)*
<b>Operating Temp:</b>	-18°C to 55°C
<b>Typical Weight:</b>	11.5 grams
<b>Typical Volume:</b>	3.8 cubic centimeters
<b>Jacket:</b>	Plastic Label
<b>Shelf Life:</b>	10 years at 21°C (80% of initial capacity)
<b>Terminal:</b>	Flat Contact


\* For additional information, please reference the [IR technical white paper](#).

Milliamp-Hours Capacity


Continuous discharge to 0.8 volts at 21°C

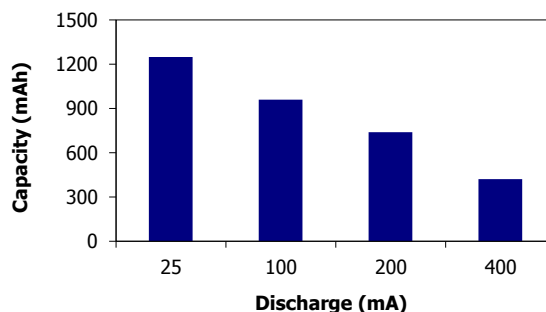

Industry Standard Testing (21°C):

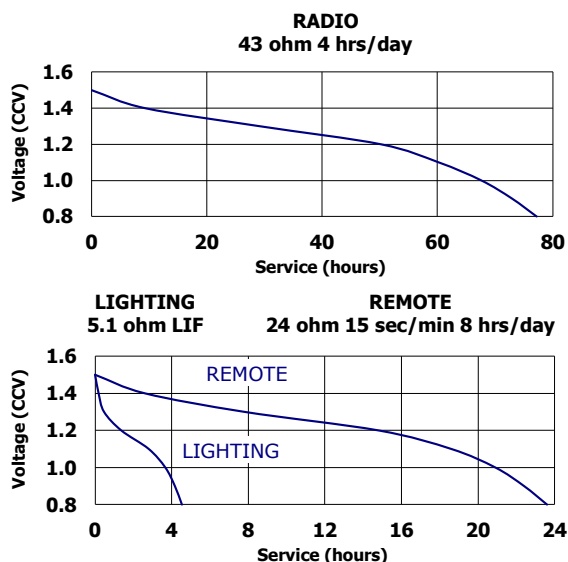

Battery Selection Indicator

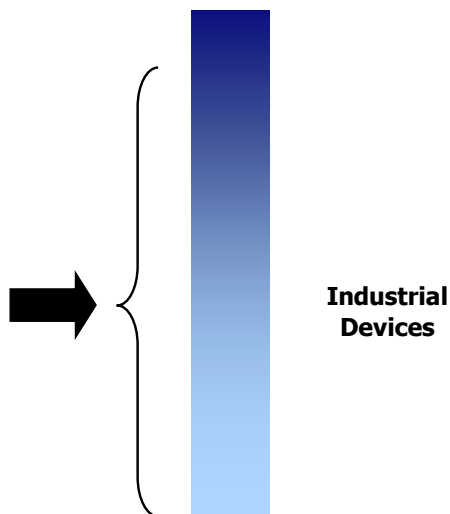


**Important Notice**

This datasheet contains typical information specific to products manufactured at the time of its publication.  
©Energizer Holdings, Inc. - Contents herein do not constitute a warranty.

Industrial (LR14)



**Industry Standard Dimensions**

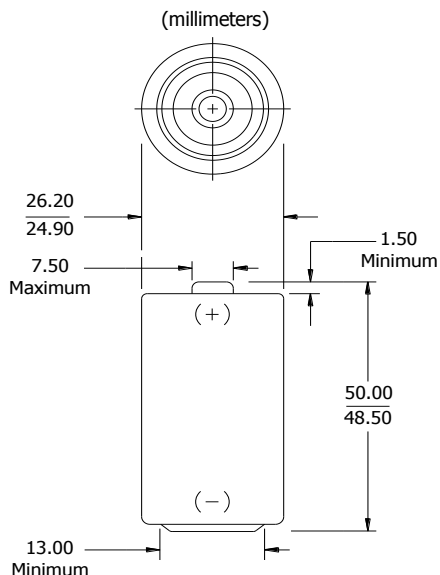


**Specifications**

<b>Classification:</b>	Alkaline
<b>Chemical System:</b>	Zinc-Manganese Dioxide (Zn/MnO <sub>2</sub> ) No added mercury or cadmium
<b>Designation:</b>	IEC-LR14
<b>Nominal Voltage:</b>	1.5 volts
<b>Nominal IR:</b>	150 to 300 milliohms (fresh)*
<b>Operating Temp:</b>	-18°C to 55°C
<b>Typical Weight:</b>	66.0 grams
<b>Typical Volume:</b>	27.0 cubic centimeters
<b>Jacket:</b>	Plastic Label
<b>Shelf Life:</b>	10 years at 21°C (80% of initial capacity)
<b>Terminal:</b>	Flat Contact


\* For additional information, please reference the [IR technical white paper](#).

**Milliamp-Hours Capacity**


Continuous discharge to 0.8 volts at 21°C

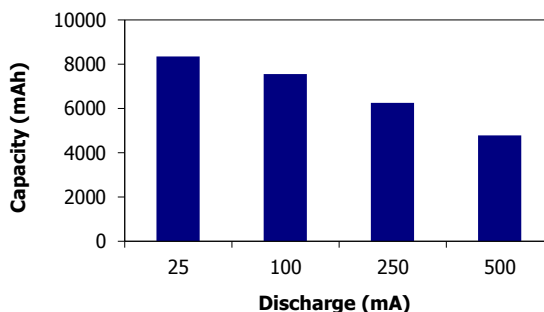

**Industry Standard Testing (21°C):**

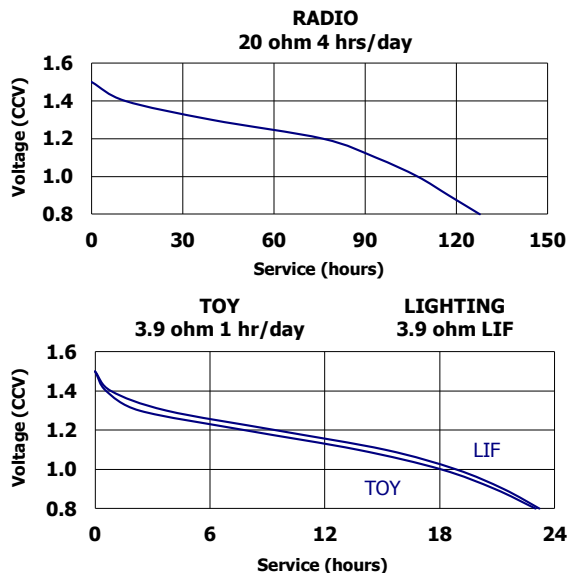

**Battery Selection Indicator**

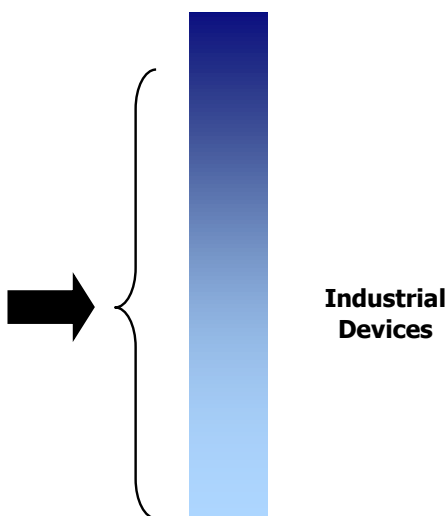

**Important Notice**


This data sheet contains typical information specific to products manufactured at the time of its publication.  
©Energizer Holdings, Inc. - Contents herein do not constitute a warranty.

# ENERGIZER EN95 (LR20)

**D**



## Industry Standard Dimensions

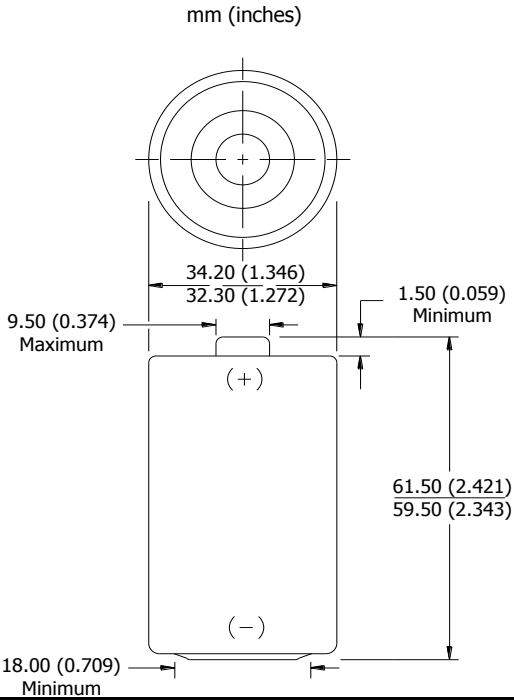


## Specifications





<b>Classification:</b>	Alkaline
<b>Chemical System:</b>	Zinc-Manganese Dioxide (Zn/MnO <sub>2</sub> ) No added mercury or cadmium
<b>Designation:</b>	ANSI-13A, IEC-LR20
<b>Nominal Voltage:</b>	1.5 volts
<b>Nominal IR:</b>	200 to 400 milliohms (fresh)
<b>Operating Temp:</b>	-18°C to 55°C (0°F to 130°F)
<b>Typical Weight:</b>	139 grams (4.9 oz.)
<b>Typical Volume:</b>	56.0 cubic centimeters (3.4 cubic inch)
<b>Jacket:</b>	Plastic Label
<b>Shelf Life:</b>	10 years at 21°C
<b>Terminal:</b>	Flat Contact
<b>Manufactured:</b>	Made in the USA

## Milliamp-Hours Capacity

Continuous discharge to 0.8 volts at 21°C

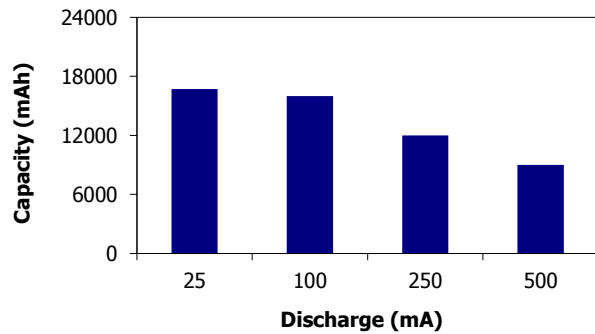

## Industry Standard Tests (21°C)

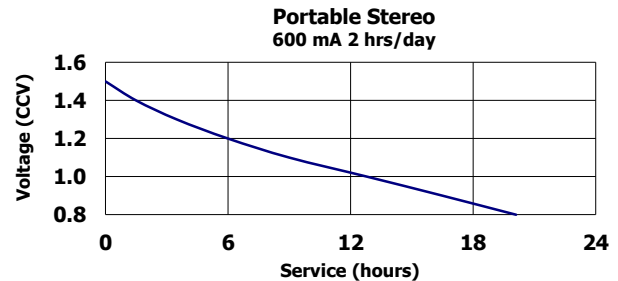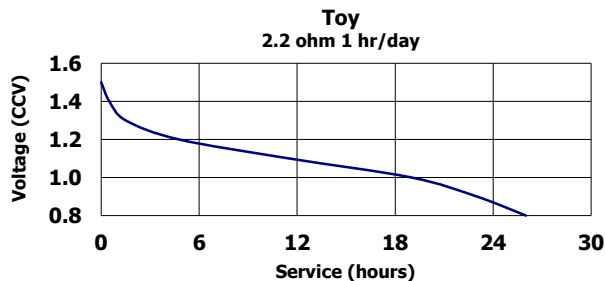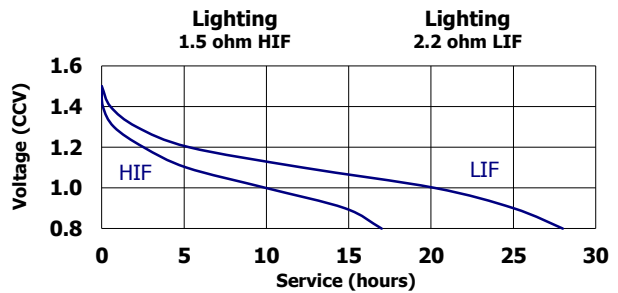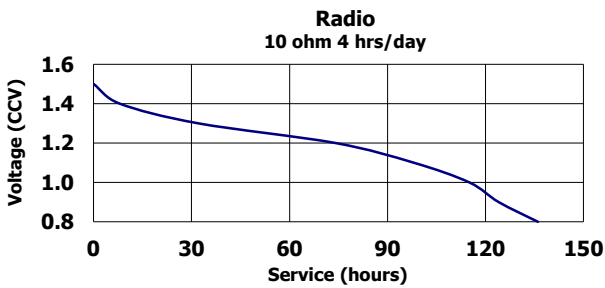

### Important Notice


This datasheet contains typical information specific to products manufactured at the time of its publication.  
**Contents herein do not constitute a warranty and are for reference only.**

# Industrial (6LR61)

9V



## Industry Standard Dimensions

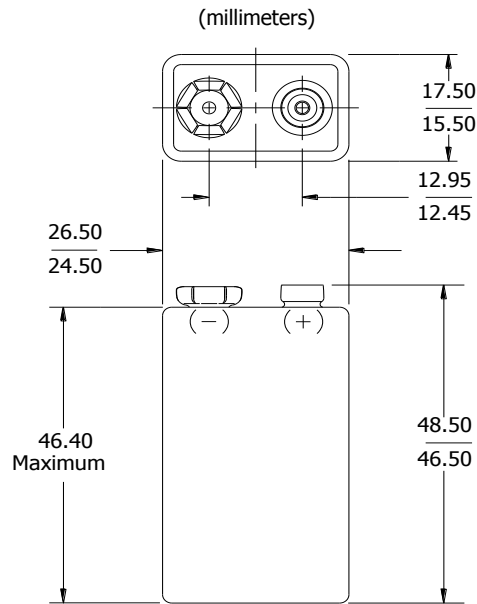


## Specifications

<b>Classification:</b>	Alkaline
<b>Chemical System:</b>	Zinc-Manganese Dioxide (Zn/MnO <sub>2</sub> ) No added mercury or cadmium
<b>Designation:</b>	IEC-6LR61
<b>Nominal Voltage:</b>	9.0 volts
<b>Operating Temp:</b>	-18°C to 55°C
<b>Typical Weight:</b>	46.0 grams
<b>Typical Volume:</b>	21.0 cubic centimeters
<b>Jacket:</b>	Metal
<b>Shelf Life:</b>	5 years at 21°C (80% of initial capacity)
<b>Terminal:</b>	Miniature Snap


## Milliamp-Hours Capacity

Continuous discharge to 4.8 volts at 21°C

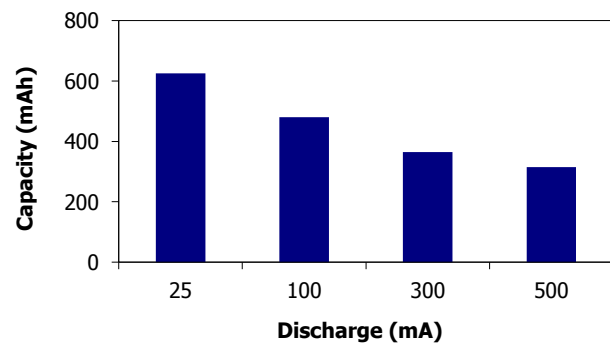


## Industry Standard Testing (21°C):


**ACCELERATED SMOKE DETECTOR**  
10K/620 ohm 1 sec/hr pulse

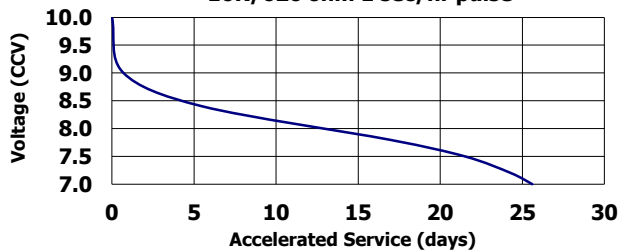

**CLOCK RADIO**  
620 ohm 2 hrs/day

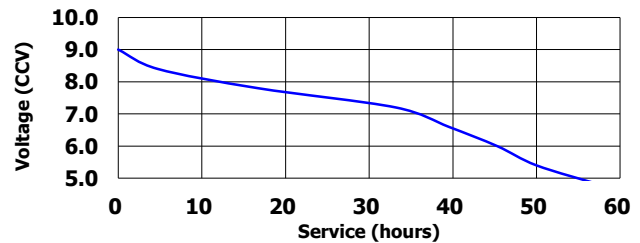

**TOY**  
270 ohm 1 hr/day

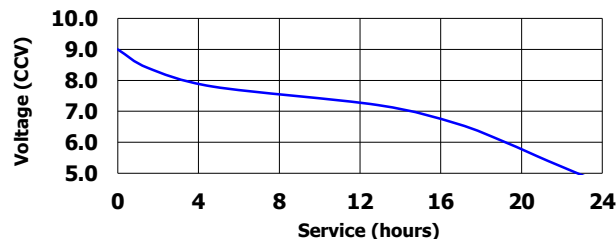

### Important Notice

This datasheet contains typical information specific to products manufactured at the time of its publication.

©Energizer Holdings, Inc. - Contents herein do not constitute a warranty.