



SKYTEC® | TRC725

LIGHTWEIGHT, OPEN FINGERS DESIGN PU COATED GLOVE WITH STEEL FIBRE

Outstanding cut resistance allowing protection in the most risky applications whilst enabling precise handling in applications necessitating open fingertip contact. PU coating protects the hand from abrasion and grease, delivering effective long lasting grip.

FEATURES

- › Cut resistant: Level E (EN 388:2016)
- › A flexible and comfortable glove offering great dexterity
- › HPPE on the inside provides comfort and protection
- › Fully encapsulated steel and nylon on the outside strengthens the protection against burrs and sharp edges
- › PU coating gives exceptional abrasion resistance and sensitivity allowing workers to handle small pieces
- › 3 open fingers to allow high precision tasks
- › Designed for easy movement and continuous wear
- › Breathable back of hand to reduce perspiration
- › Seamless knit prevents irritation



Part of the
Tricolore Range™

SUITABLE FOR

Typical Industries

- Automotive
- Construction
- Logistics
- Maintenance
- Manufacturing
- Transport

Suitable Applications

- Assembly
- Handling sharp and greasy parts
- Machining
- Bodywork
- Precision mechanics

CERTIFICATION

CAT II



EN 388:2016



4X43E

See overleaf for explanation

SKYTEC® | TRC725

PRODUCT INFORMATION

MATERIALS	LINER:	13 gauge HPPE, steel fibre, nylon
	COATING:	Polyurethane (PU)
COLOUR	Green/black	
LENGTH (mm)	250 (Size Dependent)	
CUFF STYLE	Elasticated knit wrist	

ORDERING DETAILS

SIZE	CODE	PACKAGING
6/XS	SKG00017EB	10 pairs per bag 120 pairs per case
7/S	SKG00017ED	
8/M	SKG00017EF	
9/L	SKG00017EH	
10/XL	SKG00017EJ	
11/XXL	SKG00017EL	


RECOMMENDATIONS FOR USE

- **USE:** General handling glove with cut protection. Not suitable for thermal, electrical, chemical protection. Do not use near moving machines if there is a risk of entanglement
- **STORAGE:** Store in dry conditions in the original packaging and away from direct sunlight
- **CLEANING:** To clean, wipe with a damp cloth. Note: The performance characteristics of worn and laundered gloves may differ from the results shown. Inspect the gloves to ensure no damage is present.
- **LIFETIME:** Service life depends on the glove application and therefore cannot be specified. It is the responsibility of user to ensure the glove is suitable for its intended use

CERTIFICATION LEGENDS



MECHANICAL HAZARDS EN 388:2016
PERFORMANCE LEVELS*

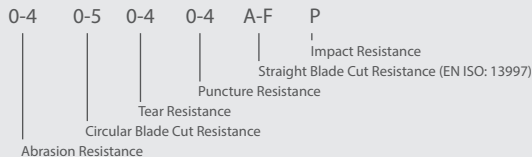

*If tests are not performed or are not applicable, 'X' will be placed instead of a number/letter

EUROPE

www.globusgroup.com

E: sales@globus.co.uk
T: +44 (0)161 877 4747
F: +44 (0)161 877 4746

MIDDLE EAST AND AFRICA

www.globusgroup.com/gcc

E: gcc@globusgroup.com
T: +971 4 882 9962
F: +971 4 882 9963



Globus Group, T2 Trafford Point, Twining Road, Trafford Park, Manchester, M17 1SH, UNITED KINGDOM
 Globus EMEA FZE, Jafza One, Tower A, Office 2201, Jebel Ali, PO Box 61195, Dubai, UNITED ARAB EMIRATES

©2020 Globus (Shetland) Ltd | SKY-DATA-TRC725-0420_1