

# LEVINA

5320PJP125B10-21.7

EAN 4031582421255

Swivel castor, housing and wheels made from high grade synthetic materials, with integrated threadguards, stem with circlip. Wheel centre made of Polypropylene, Tread: TENTEprene (thermoplastic rubber), grey non-marking, precision ball bearing, with threadguards



BETTER MOBILITY. BETTER LIFE.




Picture may differ from original product

## Technical Data

Wheel diameter	125 mm
Wheel width	32 mm
Castor width	52 mm
Metal stem with circlip	21.7 x 55 mm
Offset	37 mm
Swivel Interference	199 mm
Overall height	162 mm
Temperature	- 10 / + 60 °C
Standard	EN 12530
Weight	0.88 kg
Swivel Radius	99.5 mm
Hardness of tread	Shore A 87
Load capacity	100 kg
Load capacity (static)	200 kg

## Dimensions

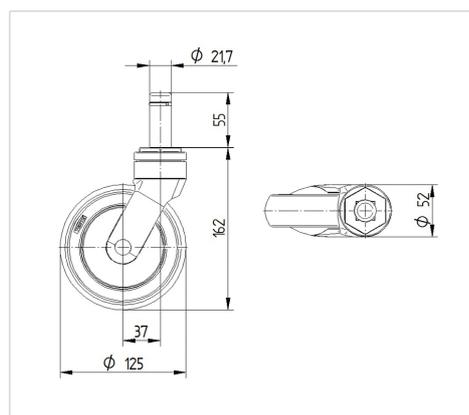

## Advantages at a glance

Roll performance	● ● ● ○ ○
Movement noise	● ● ● ● ○
Attrition	● ● ● ○ ○
Corrosion resistance	● ● ● ● ○



BETTER MOBILITY. BETTER LIFE.

## 5327PJP125B10-21.7

EAN 4031582421262

Swivel castor with total lock, tail end of castor, housing and wheels made from high grade synthetic materials, with integrated threadguards, stem with circlip. Wheel centre made of Polypropylene, Tread: TENTEprene (thermoplastic rubber), grey non-marking, precision ball bearing, with threadguards

Hint: These castors are also with grey locking lever available.




Picture may differ from original product

### Technical Data

Wheel diameter	125 mm
Width of Tread	32 mm
Castor width	52 mm
Metal stem with circlip	21.7 x 55 mm
Offset	38 mm
Swivel Interference	259 mm
Overall height	162 mm
Temperature	- 10 / + 60 °C
Standard	EN 12530
Weight	0.96 kg
Hardness of tread	Shore A 87
Load capacity	100 kg
Load capacity (static)	200 kg

### Dimensions

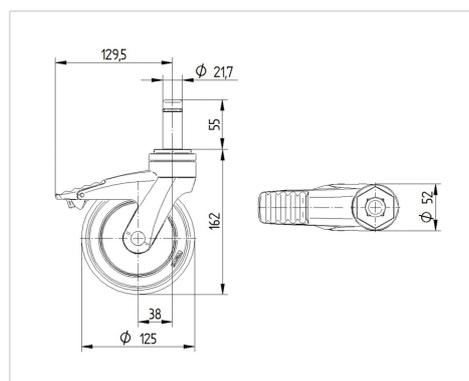

### Advantages at a glance

Roll performance	● ● ● ○ ○
Movement noise	● ● ● ● ○
Attrition	● ● ● ○ ○
Corrosion resistance	● ● ● ● ○