



NITRILE FOAM PALM WITH 3D MOISTUREVAP BREATHABILITY

Excellent resistance to abrasion. Outstanding durability and grip.

FEATURES

- › Level 4 abrasion resistance
- › Superior comfort and dexterity
- › Anatomically engineered for maximum fit
- › Excellent grip in both wet and dry environments
- › An Oeko-Tex™ certified product
- › Seamless nylon/spandex liner
- › Patented nitrile foam palm coating enhances protection
- › Sanitized® antimicrobial finish provides extra freshness
- › Light thermal protection up to 100°C for a short period
- › Touchscreen capabilities to allow usage with screen devices



SUITABLE FOR

Typical Industries

- Automotive
- Logistics
- Maintenance
- Manufacturing
- Oil and Gas
- Utilities

Suitable Applications

- Assembly
- Goods Handling
- Light Fabrication
- Quality Inspection
- Warehousing

CERTIFICATION

CAT II



EN 388:2016




4131A

EN407:2020



X1XXXX

ANSI/ISEA 105



See overleaf for explanation

**PRODUCTION INFORMATION**

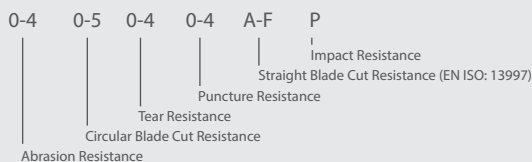
MATERIALS	LINER:	15 gauge nylon, spandex
	COATING:	Foam nitrile
COLOUR	Grey / Black	
LENGTH (mm)	250 (size dependent)	
CUFF STYLE	Elasticated knit wrist	

ORDERING DETAILS

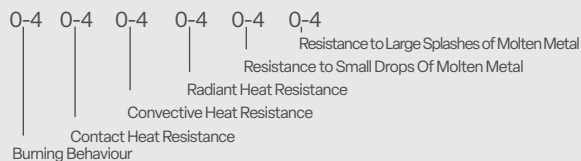
SIZE	CODE	PACKAGING
7/S	SKY491	10 pairs per bag
8/M	SKY492	
9/L	SKY493	
10/XL	SKY494	
11/XXL	SKY495	120 pairs per case

RECOMMENDATIONS FOR USE

- **USE:** General handling glove. Not suitable for thermal, electrical or chemical protection. Do not use near moving machines if there is a risk of entanglement
- **STORAGE:** Store in dry conditions in the original packaging and away from direct sunlight
- **CLEANING:** To clean, wipe with a damp cloth. Note: The performance characteristics of worn and laundered gloves may differ from the results shown. Inspect the gloves to ensure no damage is present.
- **LIFETIME:** Service life depends on the glove application and therefore cannot be specified. It is the responsibility of user to ensure the glove is suitable for its intended use

CERTIFICATION LEGENDS**MECHANICAL HAZARDS EN 388:2016 PERFORMANCE LEVELS***

*If tests are not performed or are not applicable, 'X' will be placed instead of a number/letter

**HEAT AND FIRE EN 407****PERFORMANCE LEVELS**

CLASSIFICATION FOR CUT RESISTANCE	
Measured breakthrough time	Permeation performance index (grams)
A1	≥ 200
A2	≥ 500
A3	≥ 1000
A4	≥ 1500
A5	≥ 2200
A6	≥ 3000
A7	≥ 4000
A8	≥ 5000
A9	> 6000

ANSI/ISEA 105-2016 ABRASION RATING CHART							
Abrasion Level Rating	0	1	2	3	4	5	6
Gram Load	500	500	500	500	1000	1000	1000
Abrasion Cycles to Fail	<100	≥100	≥500	≥1,000	≥3,000	≥10,000	≥20,000

ANSI/ISEA PUNCTURE RESISTANCE	
ANSI Puncture Level	Puncture Resistance (newtons)
1	10-19
2	20-59
3	60-99
4	100-149
5	150+

Puncture Resistance (ANSI/ISEA 105): Puncture resistance is determined by the max force that it takes, exerted from a probe, to puncture the fabric.

GLOBUS**EUROPE**

www.globusgroup.com

E: sales@globus.co.uk

T: +44 (0)161 877 4747

F: +44 (0)161 877 4746

MIDDLE EAST & AFRICA

www.globusgroup.com/gcc

E: gcc@globusgroup.com

T: +971 4 882 9962

F: +971 4 882 9963

GLOBUS AMERICAS

www.globusgroup.com

E: americas@globusgroup.com

Globus Group, T2 Trafford Point, Twining Road, Trafford Park, Manchester, M17 1SH, UNITED KINGDOM
 Globus EMEA FZE, Jafza One, Tower A, Office 2201, Jebel Ali, PO Box 61195, Dubai, UNITED ARAB EMIRATES
 Globus Americas LLC, 45 Rockefeller Plaza, Suite 2000, New York City, New York, 10111, USA

EU Type-Examination Certificate issued by SATRA Technology Europe Limited, Bracetown Business Park, Clonee, D15YN2P, Republic of Ireland. (Notified Body No. 2777).

UKCA Type-Examination Certificate issued by SATRA Technology Centre Ltd., Wyndham Way, Kettering, Northamptonshire, NN16 8SD, United Kingdom (Approved Body No. 0321)

The descriptions, characteristics, applications and photos are given for information purposes and do not constitute a contractual commitment. The manufacturer reserves the right to make any modifications it deems necessary.