



tested to work



06669-135 Bib & Brace with kneepad pockets

multi-protective

MASCOT® MULTISAFE



82C44	82C46	82C48	82C50	82C52	82C54	82C56	82C58	82C60
82C62	82C64	82C66	90C44	90C46	90C48	90C50	90C52	90C54
90C56	90C58	90C60	90C62	90C64	90C66			

87% cotton/12% polyamide/1% carbon fibre
320 g/m²




Canvas structure. Up to 7% shrinkage by 5x industrial washes (ISO 15797) and up to 5% by domestic washes. Wash separately. Fluorocarbon impregnation is required after each wash to maintain EN 13034 protection.

Industrial care category B2



Certifications

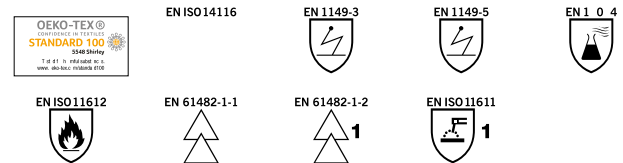

Logo

Due to the fabric's special properties, logo transfer printing is only possible with transfer type Loxy LP 157. Please contact customer service for further information.

Logo placement:

- Workwear logo. Special placement. Contact to discuss further



- Anti-static, acid-resistant and flame-retardant PyroPro®.
- Durable triple stitched seams on leg and crotch extend product life.
- Adjustable fabric straps, with short strong elastic.
- Adjustable kneepad pockets so kneepads can be optimally placed on the knee.
- Seams face downwards so sparks can not get lodged in them.
- Co-certified for use with MASCOT kneepad type SHORT or LONG, as the kneepad pocket is height-adjustable.

Technical info

Anti-static, acid-protective and flame retardent PyroPro®. Protects from electric arcs and occasional welding arcs. Teflon® makes the product dirt resistant. Triple stitched seams at leg and crotch. Adjustable straps in short, strong elastic with plastic buckles. Bib pocket with flap and hidden press stud. Inner pocket with hook and loop band fastening. Adjustable waist. Front pockets. Fly with zip. Back pockets with flap and hidden press studs. Thigh pocket with flap and hidden press studs. Ruler pocket. Adjustable knee pad pockets with flap and top access. Seams face downward so sparks can not get lodged in. Contrast stitching. We recommend 00718-100, 00418-100, 50454-916 & 20118-915 kneepads for this model. Co-certified together with kneepad type SHORT or LONG in accordance with EN 14404.

User

